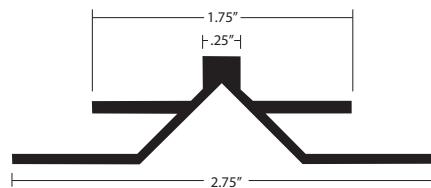


## CASEWORK PROFILES


[View All Trims](#)


### COR-5393 JOINT DIVIDER FASTENER

Eagle Aluminum's casework trims are perfect for giving your commercial casework a finished look. Aluminum casework trims are designed to fit seamlessly into wood fixtures for protection against wear and tear. When it comes to finishing casework, aluminum trims are an excellent choice. Not only are they stronger than their plastic equivalents, but they also add a sleek and modern touch to any room. All of our aluminum casework trims are corrosion resistant, lightweight, and cost-effective making them the ideal building components for large and small projects.

- Stocked in 12' lengths (120 inches)
- Stocked in Clear Satin Anodized (EA)
- Composition: 6065-T5 Extruded Aluminum

**Item Number**  
COR-5393

**Depth**  
0.75" ( $\frac{3}{4}$ ')

### FINISH OPTIONS

Eagle Architectural Casework Trims are available in Clear Satin anodized, Mill Finish, color anodized and powder coat finishes.

### ANODIZED FINISHES



Clear Satin  
AA1010



Champagne  
AA1020



Rose Gold  
AA1090



Golden Bronze  
AA1030



Light Bronze  
AA1040



Medium Bronze  
AA1050



Dark Bronze  
AA1060




Deep Bronze  
AA1070



Black  
AA1080

### POWDER COAT FINISHES



White  
PM5210



Cream  
PM5220



Almond  
PM5230



Khaki  
PM5240



Silver Gray  
PM5250



Light Gray  
PM5260



Dark Gray  
PM5270



Medium Bronze  
PM5050



Dark Bronze  
PM5060



Black  
PM5080

### FIELD PAINTING INSTRUCTIONS

Clean and prep mill finish (MF) trim in accordance with the paint manufacturer's best practices. Ensure paint and primer is recommended for aluminum via paint manufacturer. Apply coating until desired finish is achieved.

**Painting Clear Anodized:** This is generally not recommended, but can be achieved when necessary. Clean and treat aluminum with an acid etch solution. Rinse thoroughly and dry. Apply an acid-etched prime/primer based on the paint manufacturer's best practices. Apply paint coating per paint manufacturer's specifications.

### CUTTING INSTRUCTIONS

When necessary, cut material using a miter saw with a high-quality, non-ferrous carbide blade with a minimum tooth count of 80, and lubricant. Clean trim prior to installation. Refer to saw blade manufacturer's best practices for additional information.

### WARRANTY

Eagle Aluminum's warranty covers manufacturing defects for a period of three years. Refer to Eagle Aluminum's warranty documentation for additional details.